



# **Primers**

## **RZ - 900 Plastic Primer**

## **Product Description**

Single - component primer to promote adhesion of paint to plastic parts. Suitable for PP, ABS, PA or PVC plastic substrates.

### **Technical Characteristics**

Color: Transparent Shelf life: 24 months at 25°C Theoretical spreading rate: 30 - 60 m<sup>2</sup> /I (avg) at 1 um


### **Pre-treatment**

Degrease with RZ - AX800.

Wash off residues and dry thoroughly.

Re - clean with RZ - AX800. The use of a tack rag is recommended.

Plastic substrates except PE should be wet flat with P600 - 800 grade paper or dry flat with P320 - 400 grade paper.

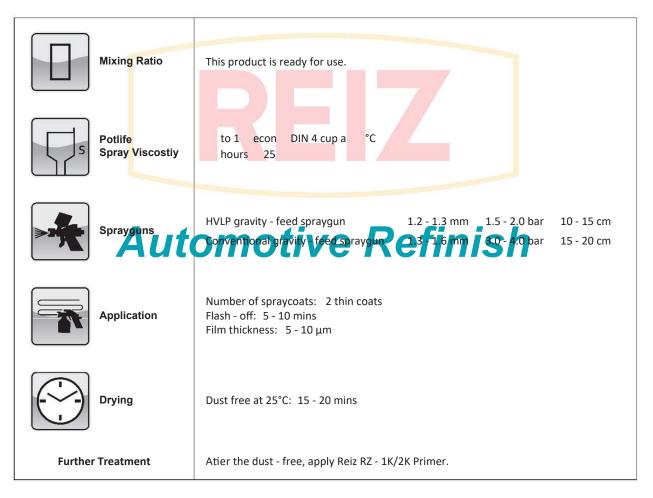

The products are suitable for professional use only. The data contained in this publication are based on our current knowledge and experience.

Youcan obtain the latest version of technical date sheet from our website at <a href="https://www.wonder-global.com">www.wonder-global.com</a> or directly from your supplier.